

**RESOLUTION NO. 48-2026**

Introduced by Tom Harris


**A RESOLUTION AUTHORIZING THE CITY MANAGER TO ACCEPT THE QUOTE AND ENTER INTO AN AGREEMENT WITH D.L. SMITH CONCRETE LLC FOR CONSTRUCTION SERVICES RELATING TO CONCRETE DRIVEWAY DEMOLITION AND INSTALLATION TO BE COMPLETED AT 429 WILLIAMS STREET IN THE CITY OF HURON, OHIO IN THE AMOUNT OF TWENTY-NINE THOUSAND SEVEN HUNDRED NINETY-FIVE AND XX/100 DOLLARS (\$29,795.00).**

**BE IT RESOLVED BY THE COUNCIL OF THE CITY OF HURON, OHIO:**

**SECTION 1.** That the City Manager shall be, and he hereby is, authorized and directed to accept the proposal and enter into an agreement with D. L. Smith Concrete LLC for construction services relating to concrete driveway demolition and installation to be completed at 429 Williams Street in the City of Huron, Ohio in the amount of Twenty-Nine Thousand Seven Hundred Ninety-Five and 00/100 Dollars (\$29,795.00), which Proposal is attached hereto as Exhibit "A."

**SECTION 2.** That this Council hereby finds and determines that all formal actions relative to the adoption of this Resolution were taken in an open meeting of this Council and that all deliberations of this Council and of its Committees, if any, which resulted in formal action, were taken in meetings open to the public in full compliance with applicable legal requirements, including O.R.C. §121.22.

**SECTION 3.** That this Resolution shall be in full force and effect from and immediately after its adoption.

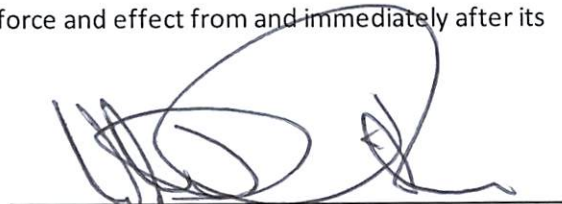

William Biddlecombe, Vice-Mayor

ATTEST:

  
Clerk of Council

ADOPTED:

**09 JUN. 2026**





585 Old State Road  
 Norwalk, Ohio 44857  
 Office: 419.499.9000  
 dlsmithconcrete@yahoo.com

## Proposal

Date:  
 6-1-26

Job Name:  
 429 Williams St

Name/ Address  
 CITY OF HURON  
 417 Main St  
 Huron, Ohio 44839  
 ATTN: Stuart Hamilton

### PROJECT SCOPE & REFERENCE

This proposal is derived from the details provided on the project plan sheets combined with the specific site conditions, field directives, and clarifications established during the recent on-site walkthrough with the City Manager. The lump sum price detailed below incorporates all necessary labor, equipment, mobilization, and material costs to execute the work as intended.

The quantities listed below are engineering approximations derived for bidding purposes to establish the clear baseline scope. Final contract billing is structured as a fixed lump sum total based on these parameters.

ITEM NO.	DESCRIPTION OF WORK	APPROX. QTY	UNIT	
1	Full Depth Sawcutting	160.00	LF	
2	Curb Removed	24.00	LF	
3	Pavement Removed	108.00	SY	
4	Walk Removed	120.00	SF	
5	Excavation	54.00	CY	
6	Subgrade Compaction	255.00	SY	
7	Aggregate Base	35.00	CY	
8	Type 6 Concrete Curb	24.00	LF	
9	6" Non-Reinforced Concrete Pavement	163.00	SY	
10	4" Concrete Walk	390.00	SF	
11	Water Meter Pit Adjustment (Traffic-Rated Casting Provided by City)	1.00	EA	
12	Topsoil Placement / Restoration	32.00	CY	
<b>TOTAL LUMP SUM BID</b>				<b>\$29,795.00</b>

### PROJECT CLARIFICATIONS & CONDITIONS

City-Furnished Equipment: The water meter pit adjustment utilizes a traffic-rated casting provided by the City. Installation, positioning, and secondary materials are included within this lump sum bid.

Quantity Variations: Quantities listed in this document are approximations (±) based on visual field reviews and current plan sheets. Minor field adjustments within the established footprint are accepted as part of the total

We appreciate the opportunity to quote the above mentioned project. If you have any questions regarding this quotation, please contact Tim Beler at (419)-706-7845 or tim.dlsmithconcrete@gmail.com

Authorized Signature

Note: This proposal may be withdrawn by us if not accepted within 30 days.

x  
 Signature of Acceptance \_\_\_\_\_ Date \_\_\_\_\_